



Attic ladders



Space saving staircases



Modular staircases




Spiral staircases



Main staircases



*The safe way up!..*

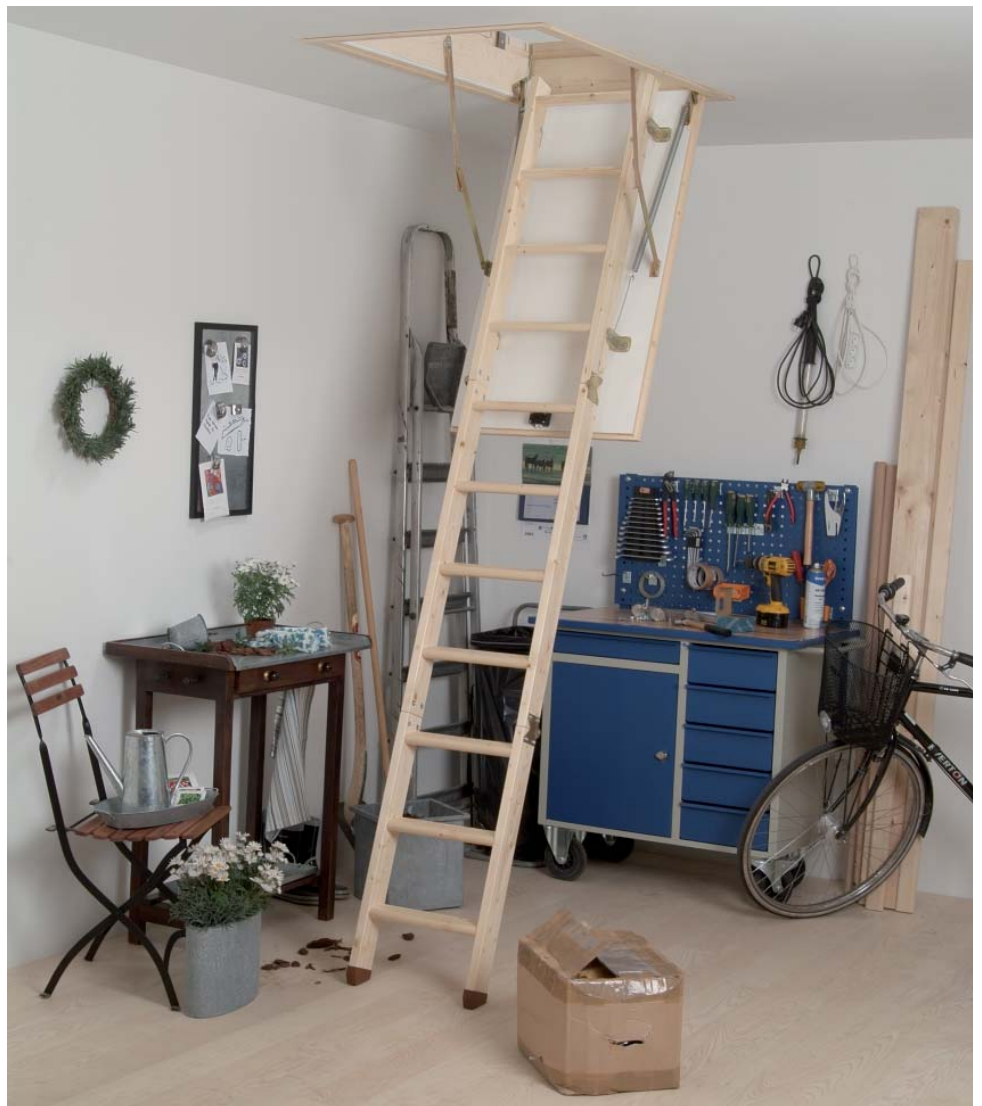

# Timberlex30

## Wooden attic ladder

- 3 section folding attic ladder
  - requires no headroom or storage space in the loft.
- Ladder made of solid spruce. Plastic feet included.
- Nice finish with white-faced trapdoor.
- Rubber draught excluder contained in casing and trapdoor with 30-mm insulation prevents loss of heat and draught.
- Air sealing: Class 4 tested at IFT Rosenheim according to EN 12207.
- Floor-to-ceiling heights up to 287 cm. 12 treads as standard.
- Non-slip treads for extra security.
- 7 standard sizes.
- Specially developed height adjustment system.
- Casing and trapdoor with a rebate for extra tight closing.
- Easy operation – delivered with push/pull rod made of wood.
- Easy and quick installation - completely assembled and ready to install.
- Unique robustness: Tested according to EN 14975. Test load 265 kg, - max working load 150 kg.

# Timberlex30



## Technical data (model no. 27600)

Model no.	Casing size (E)	Opening size (D)	Floor-to-ceiling height max. (A)	Casing height	Number of treads	Max. landing space (B)	Max. swing clearance (C)
27611	112,5 x 55,0	115 x 57	282,5 cm	14 cm	12	134,6 cm	161 cm
27617	112,5 x 67,6	115 x 70	282,5 cm	14 cm	12	134,6 cm	161 cm
27626	117,5 x 57,6	120 x 60	285,3 cm	14 cm	12	135,7 cm	162 cm
27627	117,5 x 67,6	120 x 70	285,3 cm	14 cm	12	135,7 cm	162 cm
27636	127,5 x 57,6	130 x 60	285,3 cm	14 cm	12	135,7 cm	162 cm
27637	127,5 x 67,6	130 x 70	285,4 cm	14 cm	12	135,7 cm	162 cm
27647	137,5 x 67,6	140 x 70	285,3 cm	14 cm	12	135,7 cm	162 cm

G: 263 - 448 mm

H: 68 - 72°

J: 336 mm

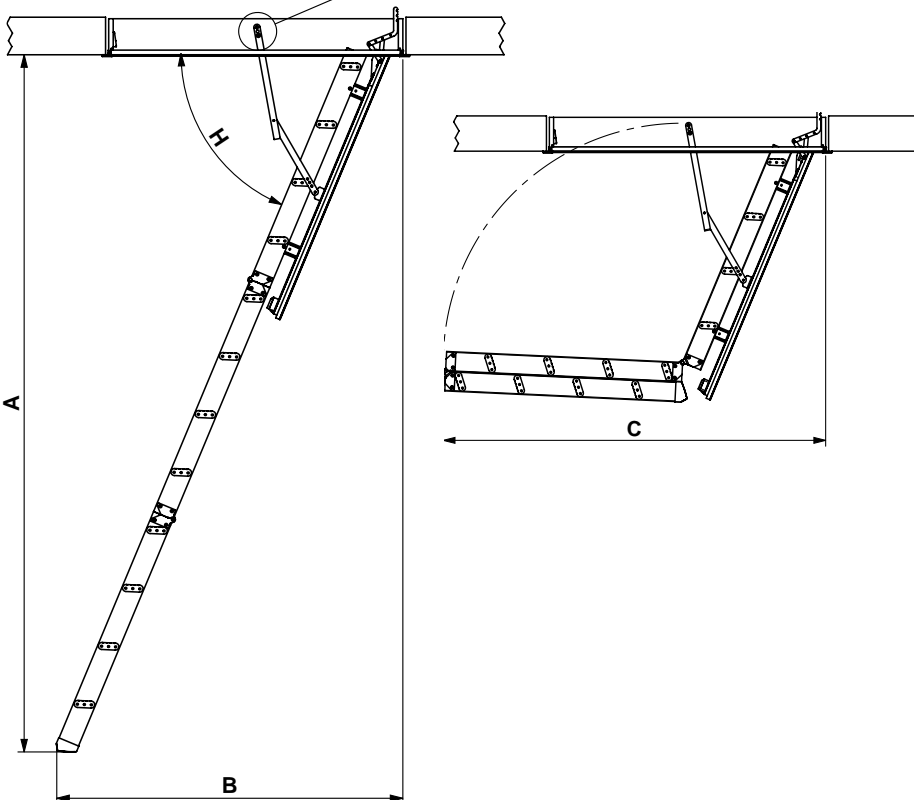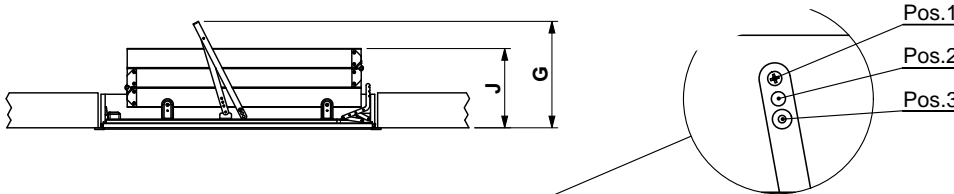

### Casing

Material: Massive spruce

Thickness: 18 mm

Height: 140 mm

The lower edge of the casing is rebated and has a draught excluder, which ensures tight closing.

### Trapdoor

Material: 30 mm spruce frame, 30 mm insulation and white masonite plates on both sides.

Thickness: 36 mm

Insulation: 30 mm polystyrene

Insulation coefficient: 0,96 W/m<sup>2</sup> °C in insulated area calculated according to EN 14975

### Ladder

Material: spruce

Width: 400 mm

Distance between treads: 250 mm

### Tread dimensions

Thickness: 28 mm

Depth: 82 mm

### String dimensions

Thickness: 28 mm

Depth: 84 mm

All treads have a non-slip surface

### Accessories

- Guardrail
- Metal handrail
- Mounting brackets